

Product specification

Date: 2018-05-28

Index: 1



Product: G 95

Description: Reinforcement fabric for indoor & outdoor walls & ceilings


Composition: yarn of glassfibre in warp.
yarn of glassfibre in weft.
Standard soft touch coating

Technical data:

Properties	Unit	Nom value
Weave construction		plain weave
Width	mm	1000 +1/-0
Length	m	50
Total weight	g / m ²	95 +3/-3
Tensile strength		
Warp direction	N / 5cm	> 1470
Weft direction	N / 5cm	> 1000

Facing side

Facing side is the outside of the roll.

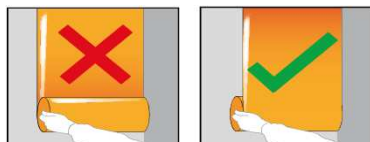

Reverse side marking

No marking on this product

Pattern matching

Straight match - thread to thread.




Pick over warpthread against pick under warpthread

packaging: 9 rolls/ carton
54 rolls/ pallet
straight-edged winding on paper cores

storage: protect from moisture, store in a dry place

Certificates:



Storing: -10 to +50 degrees Celcius
Use within 2 years after production



Information above is accurate to the best of our knowledge. Our products are subject to rigorous quality control along the production line to ensure conformance. Divergence within our tolerance may occur.

Preiss-Daimler FibreGlass AB, Rundgangen 24, S-25452 Helsingborg. Tel +46 42 25 05 00, Fax + 46 42 16 01 42