
STARCUTTER

RATIO DRILL HEAD

Brickwork drilled through quickly - flexible in depth and diameter.

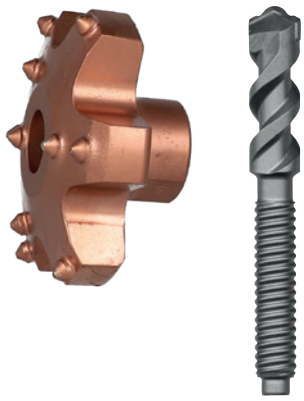

PRODUCT DESCRIPTION

- Highest drilling performance and long service life thanks to high-alloy special steel
- Fast progress even in hard concrete

2260 RATIO ADAPTER FOR HAMMER DRILL BITS

Art. 4010159-		mm	
15547 2	SDS-plus	108	1
10243 8	SDS-max	185	1
29790 5	SDS-max	400	1
29791 2	SDS-max	975	1

2208 PILOT BITS

Art. 4010159-	mm Ø	mm	mm	
19945 2	18	50	125	1
19946 9	18	100	175	1

Art. 4010159-	mm Ø	mm	mm	
19933 9	35	40		1
19934 6	42	40		1
19935 3	52	40		1
19936 0	65	40		1
19937 7	80	40		1
19970 4	90	40		1
19938 4	100	40		1
19969 8	110	40		1
19939 1	125	40		1

Website info

2131 THREAD GREASE

Recommended for use with Ratio Threaded joints

Art. 4010159-	mm Ø	mm	mm	heller
19947 6	-	-	-	1

Product group **2411**



RATIO

Diameter 35–125 mm





PROFESSIONAL PLUS

Hammer drilling



