



Air Boy® TURBO



The venturi nozzle increases the air flow by 100%

The Air Boy® TURBO blowgun provides a high air flow and the nozzle is unblockable.

The Air Boy® TURBO is suitable for tasks, where there is a demand for a high air volume, i.e. shavings, sawdust, dust etc. The construction of the nozzle secures that the nozzle is unblockable and thereby meets the OSHA STD 1-13.1.

The Air Boy® TURBO nozzles are also produced as loose nozzles and can be bought separately. ø6 mm (140115) and ø8 mm (140116). When the nozzle has been added to the pipe of the blowgun, it is not possible to dismount it again.

The JWJL ergonomic design is a classic in itself. We use the compressed air to ease the activating of the handle making it easy, accurate and simple to operate. The Air Boy® TURBO is produced in an impact-resistant acetal plastic (POM).

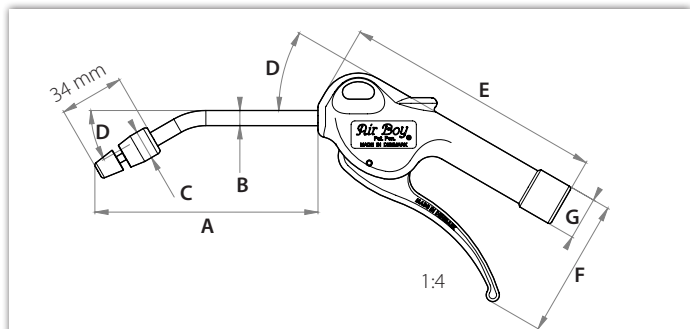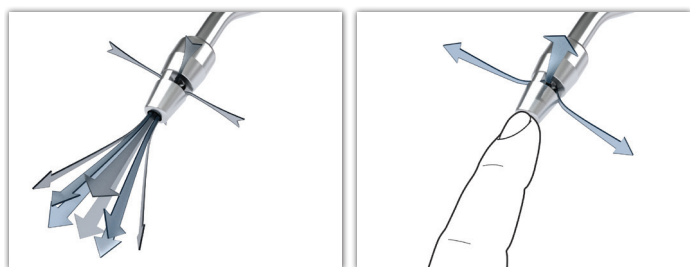

Dimensions

A	118 mm	C	ø 15,5 mm	E	138 mm	G	ø 22.6 mm
B	ø 8 mm	D	30 °	F	73.6 mm	⊕ 1/4 " BSP	



25

Year Warranty
Jahre Garantie
ans de Garantie
años de garantía
års garanti

The durability of our blowguns is top notch - even after 28 million operations. Therefore, we are also proud to offer you a 25 year warranty on the valve system in your Air Boy® blowgun!

Materials		Specifications		Directives	
Handle and trigger	Acetal plastic	Max 16 bar	300 l/min (8bar)	2003/10/CE	Max 85 dB
Valve	Acetal plastic	85,4 dB (8 bar), (83,7 db at 6 bar)	-10°C to +80°C	OSHA 1910.95 (b)	Max 90 dB 8 hr
Gaskets / O-rings	Nitrile	~0,115 kg		OSHA STD 1-13.1	Max 30 psi when blocked
Blowing tube & shaft	Steel, el. galvanised				
Spring	Hardened spring wire				

Flow	l/min(cfm) / bar(psi)	Noise level	dB / bar(psi)	Blowing force	Newton (g) / bar(psi)