

IRONSIDE®

360101/G
IR202235

Ketel - cuve : 6L
Kop - tête : 0,7 HP
Debiet - débit : 89 l/min
Druk - pression: 8 bar
Geluidsniveau - niveau sonore: 48 dB max
Spanning - tension: 220-240V, 50 Hz
Gewicht - poids: 15 kg

ZONDER OLIE
SANS HUILE

Lager geluidsniveau
Niveau sonore plus bas




42 cm

15,5 cm

BOX:
W430xD170xH420 mm

42,5 cm

PARTS DIAGRAM

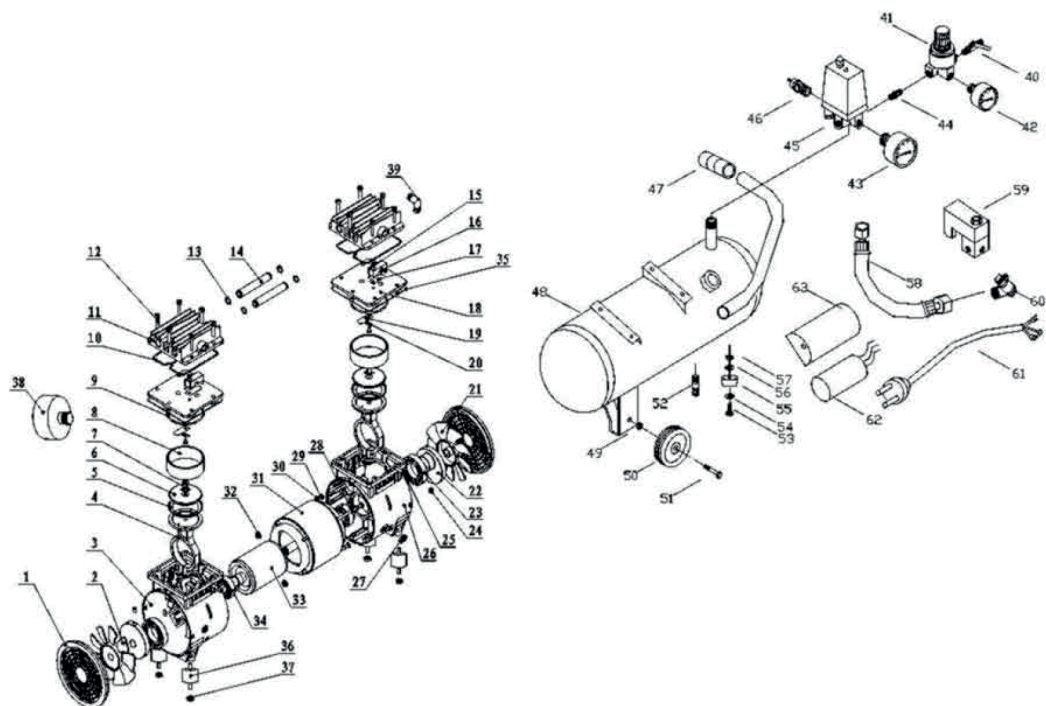

- | | | | |
|----------------------|---------------------|---------------------------|----------------------|
| 1. Cover | 17. Reed Valve | 33. Rotor | 49. Wheel Nut |
| 2. Left Fan | 18. Reed Valve | 34. Bearing 6203-2z | 50. Wheel |
| 3. Left Crankcase | 19. Valve Plate | 35. Adjusting Washer | 51. Bolt (Axle) |
| 4. Connecting Rod | 20. Washer | 36. Rubber Mount | 52. Tank Drain Cock |
| 5. Piston Cup | 21. Right Fan | 37. Spring Washer | 53. Bolt |
| 6. Binder Plate | 22. Shaft Seal | 38. Air Filter | 54. Washer |
| 7. Con Rod Bolt | 23. Bearing 6908-2z | 39. Elbow | 55. Cushion Foot |
| 8. Cylinder | 24. Bearing Bolt | 40. Deflating Tap | 56. Washer |
| 9. Cylinder Seal | 25. Bearing Bolt | 41. Regulator | 57. Nut |
| 10. Head Seal | 26. Right Crankcase | 42. Outlet Pressure gauge | 58. Pipe |
| 11. Cylinder Head | 27. Protection Ring | 43. Tank Pressure gauge | 59. Actuated Valve |
| 12. Head Bolt | 28. Assembly Bolt | 44. Connector | 60. Non Return Valve |
| 13. 'O' Ring | 29. Assembly Bolt | 45. Pressure Switch | 61. Plug and Lead |
| 14. Transfer Pipe | 30. Spring Washer | 46. Safety Valve | 62. Capacitor |
| 15. Valve Plate Bolt | 31. Stator | 47. Handle | 63. Capacitor cover |
| 16. Valve Block | 32. Assembly Nut | 48. Tank | |