

TECHNICAL DATASHEET

4tec^x (Betonschroef SR-anti cor ETA 1 & Betonschroef SR-anti Cor ETA 1 TX30)

4tec^x article numbers:

4050001508, 4050001516, 4050001524, 4050001532, 4050001540, 4050001548, 4050001556, 4050001564, 4050001572, 4050001580, 4050001588, 4050001596, 4050001600, 4050001608, 4050001616, 4050001624



Betonschroef SR-anti cor ETA 1



Betonschroef SR-anti Cor ETA 1 TX30



TFF



TFE



THT



TFM



TFN



THP



TFS

CHARACTERISTICS

- Pilot hole in concrete needed, thread is created by the anchor during the Installation process.
- Use for high loads.
- Assessed for 2 installation depths and 3 for Ø10.
- Use in cracked and non-cracked concrete.
- Suitable when reduced edge distances or spacing required.
- Qualified for static and quasi-static.
- Easy installation.
- Installation through the fixture.
- Reusable
- Removable, leaving concrete surface flat.
- Variety of lengths and sizes, assembly flexibility.


APPLICATION

- Structural fixings in cracked and uncracked concrete subject to dry internal conditions.
- Glazing, windows and storefronts
- Racking and shelving
- Attaching railings handrails and ledgers
- Fixings wood structures in concrete.

ASSESSMENT



BASE MATERIAL



SIZE RANGE

Ø5 - Ø18


DRILL CONDITION



MAXIMUM LOADS RECOMMENDED FOR CRACKED AND UNCRACKED CONCRETE [kg]




APPLICATION EXAMPLES

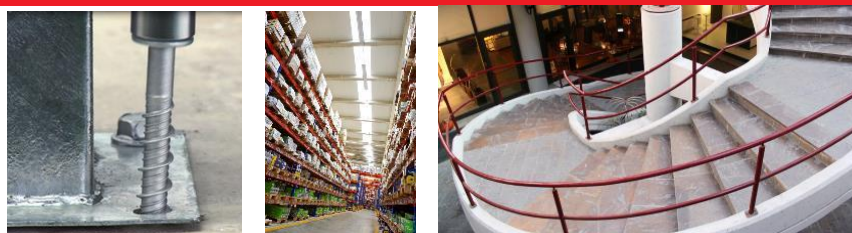

1. RANGE					
ITEM	CODE	SIZES	PHOTO	DESCRIPTION	MATERIAL
1	THE Betonschroef SR-anti cor ETA 1	Ø5 - Ø18		Hexagonal head with flange screw anchor	Carbon steel, ATLANTIS coating
2	TFE	Ø5 - Ø18		Hexagonal head with flange screw anchor	Carbon steel , zinc plated coating ≥ 5 µm
3	TFN	Ø14		Hexagonal head screw anchor	Carbon steel , zinc plated coating ≥ 5 µm
4	THA Betonschroef SR-anti Cor ETA 1 TX30	Ø5 - Ø10		Countersunk screw anchor	Carbon steel, ATLANTIS coating
5	THT	Ø6		Truss head screw anchor	Carbon steel, ATLANTIS coating
6	THP	Ø5 - Ø8		Pan head screw anchor	Carbon steel, ATLANTIS coating
7	TFF	Ø6		Rod hanger internal thread screw anchor	Carbon steel , zinc plated coating ≥ 5 µm
8	TFM	Ø6		Hexagonal head with flange and with external thread screw anchor	Carbon steel , zinc plated coating ≥ 5 µm
9	TFS	Ø6 - Ø10		Stud head screw anchor	Carbon steel , zinc plated coating ≥ 5 µm

2. INSTALLATION DATA

2.1. INSTALLATION DRAWING

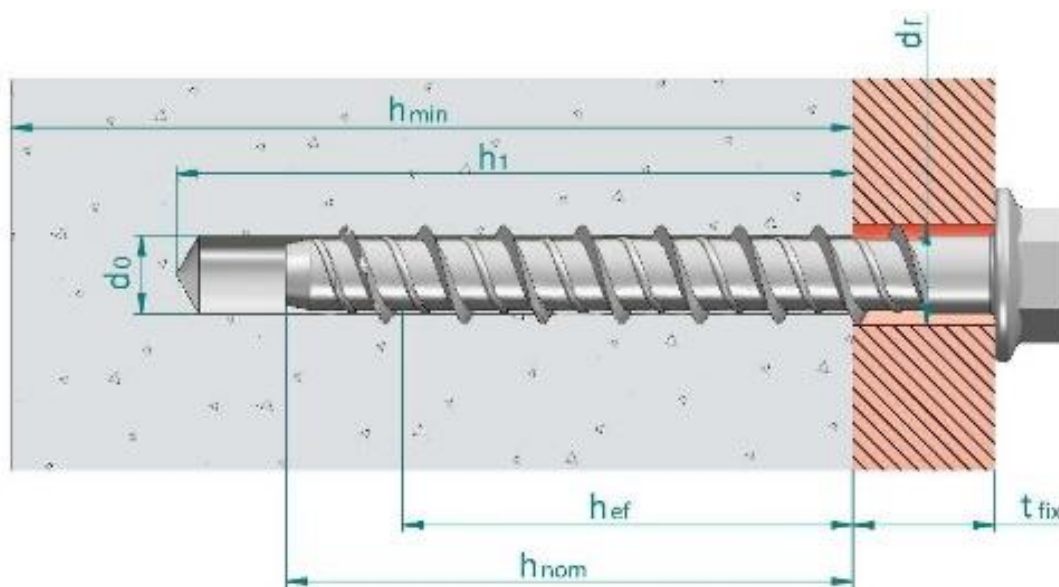

- d_0 : Nominal diameter of drill bit
- d_f : Fixture clearance hole diameter
- h_{ef} : Effective anchorage depth
- h_1 : Depth of drilled hole
- h_{nom} : Overall fastener embedment depth in the concrete
- h_{min} : Minimum thickness of concrete member
- t_{fix} : Fixture thickness

3. INSTALLATION PARAMETERS

General Installation parameters										Standard Installation depth (h _{ef, std})									Reduced Installation depth (h _{ef, red})								
Family	Code	Size	Assessed	Drill bit diameter	Fixture clearance hole	Spanner	Maximum torque	Minimum allowable spacing	Minimum allowable edge distance	Minimum concrete thickness	Depth of drill hole	Installation depth	Effective anchorage depth	Thickness of fixture	Critical spacing (concrete cone)	Critical edge distance (cone)	Critical spacing (splitting)	Critical edge distance (splitting)	Minimum concrete thickness	Depth of drill hole	Installation depth	Effective anchorage depth	Thickness of fixture	Critical spacing (concrete cone)	Critical edge distance (cone)	Critical spacing (splitting)	Critical edge distance (splitting)
[--]	[--]	[--]	ETA	d ₀ [mm]	d _f [mm]	SW/Tx [--]	T _{inst} [Nm]	S _{min} [mm]	C _{min} [mm]	h _{min} [mm]	h ₁ [mm]	h _{nom} [mm]	h _{ef} [mm]	t _{fix} [mm]	S _{cr,N} [mm]	C _{cr,N} [mm]	S _{cr,sp} [mm]	C _{cr,sp} [mm]	h _{min} [mm]	h ₁ [mm]	h _{nom} [mm]	h _{ef} [mm]	t _{fix} [mm]	S _{cr,N} [mm]	C _{cr,N} [mm]	S _{cr,sp} [mm]	C _{cr,sp} [mm]
Betonschroef SR-anti cor ETA 1	4050001508	Ø5 x 40	--	5	7	SW 8	8	35	35	--	--	--	--	--	--	--	--	--	100	40	35	25,0	5	75	38	90	45
	THE05050	Ø5 x 50	--			SW 8				5	15																
	4050001516	Ø5 x 60	--			SW 8				15	25																
	THE05080	Ø5 x 80	--			SW 8				35	45																
	THE05100	Ø5 x 100	--			SW 8				55	65																
	4050001524	Ø6 x 40	✓	6	9	SW 10	10	35	35	--	--	--	--	--	--	--	--	--	100	45	35	26,0	5	78	39	90	45
	THE06050	Ø6 x 50	✓			SW 10				--	15																
	4050001532	Ø6 x 60	✓			SW 10				5	25																
	THE06070	Ø6 x 70	✓			SW 10				15	35																
	4050001540	Ø6 x 80	✓			SW 10				25	45																
	4050001548	Ø6 x 100	✓	8	12	SW 10	20	35	35	100	65	55	43,0	45	129	65	170	85	100	60	50	37,5	65	113	57	130	65
	THE06120	Ø6 x 120	✓			SW 10								65									85				
	4050001556	Ø8 x 55	✓			SW 13								--									5				
	4050001564	Ø8 x 60	✓			SW 13								--									10				
	4050001572	Ø8 x 70	✓			SW 13								5									20				
	THE08080	Ø8 x 80	✓			SW 13								15									30				
	4050001580	Ø8 x 90	✓			SW 13								25									40				
	THE08100	Ø8 x 100	✓			SW 13								35									50				
	THE08110	Ø8 x 110	✓			SW 13								45									60				
	THE08120	Ø8 x 120	✓			SW 13								55									70				
	THE08140	Ø8 x 140	✓			SW 13								75									90				
	THE10060	Ø10 x 60	✓	10	14	SW 15	30	50	40	--	--	--	--	--	--	--	--	--	100	65	55	41,5	5	125	63	140	70
	4050001588	Ø10 x 70	✓			SW 15				--	15																
	THE10080	Ø10 x 80	✓			SW 15				--	25																
	THE10090	Ø10 x 90	✓			SW 15				5	35																
	4050001596	Ø10 x 100	✓			SW 15				15	45																
	THE10120	Ø10 x 120	✓			SW 15				35	65																
	THE10140	Ø10 x 140	✓			SW 15				55	85																

General Installation parameters										Standard Installation depth (h _{ef, std})								Reduced Installation depth (h _{ef, red})									
Family	Code	Size	Assessed	Drill bit diameter	Fixture clearance hole	Spanner	Maximum torque	Minimum allowable spacing	Minimum allowable edge distance	Minimum concrete thickness	Depth of drill hole	Installation depth	Effective anchorage depth	Thickness of fixture	Critical spacing (concrete cone)	Critical edge distance (cone)	Critical spacing (splitting)	Critical edge distance (splitting)	Minimum concrete thickness	Depth of drill hole	Installation depth	Effective anchorage depth	Thickness of fixture	Critical spacing (concrete cone)	Critical edge distance (cone)	Critical spacing (splitting)	Critical edge distance (splitting)
[--]	[--]	[--]	ETA	d ₀	d _f	SW/Tx	T _{inst}	S _{min}	C _{min}	h _{min}	h ₁	h _{nom}	h _{ef}	t _{fix}	S _{cr,N}	C _{cr,N}	S _{cr,sp}	C _{cr,sp}	h _{min}	h ₁	h _{nom}	h _{ef}	t _{fix}	S _{cr,N}	C _{cr,N}	S _{cr,sp}	C _{cr,sp}
				[mm]	[mm]	--	[Nm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]
Betonschroef SR-anti cor ETA 1	THE12080	Ø12 x 80	✓	12	16	SW 18	50	75	45	--	--	--	--	--	--	--	--	--	120	90	75	58,0	5	174	87	190	95
	THE12090	Ø12 x 90	✓			SW 18				--	--	--	--	--	--	--											
	THE12110	Ø12 x 110	✓			SW 18				170	120	105	83,5	5	251	126	220	110					35				
	THE12130	Ø12 x 130	✓			SW 18								25									55				
	THE12150	Ø12 x 150	✓			SW 18								45									75				
	THE14080	Ø14 x 80	✓	14	18	SW 21	70	80	50	--	--	--	--	--	--	--	--	--	120	90	75	58,0	5	174	87	190	95
	THE14100	Ø14 x 100	✓			SW 21				--	--	--	--	--	--	--	--										
	THE14120	Ø14 x 120	✓			SW 21				185	130	115	92,0	5	276	138	230	115					45				
	THE14130	Ø14 x 130	✓			SW 21								15									55				
	THE14140	Ø14 x 140	✓			SW 21								25									65				
	THE14160	Ø14 x 160	✓			SW 21								45									85				
	THE18100	Ø18 x 100	✓	18	22	SW 24	90	90	55	--	--	--	--	--	--	--	--	--	140	110	90	69,5	10	209	105	230	115
	THE18130	Ø18 x 130	✓			SW 24				--	--	--	--	--	--	--	--										
	THE18160	Ø18 x 160	✓			SW 24				225	160	140	112,0	20	336	168	350	175					70				
	THE18180	Ø18 x 180	✓			SW 24								40									90				
	THE18200	Ø18 x 200	✓			SW 24								60									110				

General Installation parameters										Standard Installation depth (h _{ef, std})									Reduced Installation depth (h _{ef, red})																									
Family	Code	Size	Assessed	Drill bit diameter	Fixture clearance hole	Spanner	Maximum torque	Minimum allowable spacing	Minimum allowable edge distance	Minimum concrete thickness	Depth of drill hole	Installation depth	Effective anchorage depth	Thickness of fixture	Critical spacing (concrete cone)	Critical edge distance (cone)	Critical spacing (splitting)	Critical edge distance (splitting)	Minimum concrete thickness	Depth of drill hole	Installation depth	Effective anchorage depth	Thickness of fixture	Critical spacing (concrete cone)	Critical edge distance (cone)	Critical spacing (splitting)	Critical edge distance (splitting)																	
[--]	[--]	[--]	ETA	d ₀ [mm]	d _f [mm]	SW/Tx [--]	T _{inst} [Nm]	S _{min} [mm]	C _{min} [mm]	h _{min} [mm]	h ₁ [mm]	h _{nom} [mm]	h _{ef} [mm]	t _{fix} [mm]	S _{cr,N} [mm]	C _{cr,N} [mm]	S _{cr,sp} [mm]	C _{cr,sp} [mm]	h _{min} [mm]	h ₁ [mm]	h _{nom} [mm]	h _{ef} [mm]	t _{fix} [mm]	S _{cr,N} [mm]	C _{cr,N} [mm]	S _{cr,sp} [mm]	C _{cr,sp} [mm]																	
TFE	TFE05040	Ø5 x 40	--	5	7	SW 8	8	35	35	--	--	--	--	--	--	--	--	--	100	40	35	25,0	5	75	38	90	45																	
	TFE05050	Ø5 x 50	--			SW 8				5	15																																	
	TFE05060	Ø5 x 60	--			SW 8				15	25																																	
	TFE05080	Ø5 x 80	--			SW 8				35	45																																	
	TFE05100	Ø5 x 100	--			SW 8				55	65																																	
	TFE06040	Ø6 x 40	✓	6	9	SW 10	10	35	35	--	--	--	--	--	--	--	--	--	100	45	35	26,0	5	78	39	90	45																	
	TFE06050	Ø6 x 50	✓			SW 10				--	15																																	
	TFE06060	Ø6 x 60	✓			SW 10				5	25																																	
	TFE06070	Ø6 x 70	✓			SW 10				15	35																																	
	TFE06080	Ø6 x 80	✓			SW 10				25	45																																	
	TFE06100	Ø6 x 100	✓	8	12	SW 10	20	35	35	100	65	55	43,0	45	129	65	170	85	100	60	50	37,5	65	113	57	130	65																	
	TFE06120	Ø6 x 120	✓			SW 10								65									85																					
	TFE08055	Ø8 x 55	✓			SW 13								--									--					--	--	--	--	--	--	--	--	100	60	50	37,5	5	113	57	130	65
	TFE08060	Ø8 x 60	✓			SW 13								--									--					--	--	--	--	--	--	--										
	TFE08070	Ø8 x 70	✓			SW 13								100									75					65	50,5	5	152	76	200	100	20									
	TFE08080	Ø8 x 80	✓	SW 13	15	30																																						
	TFE08090	Ø8 x 90	✓	SW 13	25	40																																						
	TFE08100	Ø8 x 100	✓	SW 13	35	50																																						
	TFE08110	Ø8 x 110	✓	SW 13	45	60																																						
	TFE08120	Ø8 x 120	✓	SW 13	55	70																																						
	TFE08140	Ø8 x 140	✓	SW 13	75	90																																						
	TFE10060	Ø10 x 60	✓	10	14	SW 15	30	50	40	--	--	--	--	--	--	--	--	--	--	100	65	55	41,5	5	125	63	140	70																
	TFE10070	Ø10 x 70	✓			SW 15				--	--	--	--	--	--	--	--	--																										
	TFE10080	Ø10 x 80	✓			SW 15				--	--	--	--	--	--	--	--	--																										
	TFE10090	Ø10 x 90	✓			SW 15				135	95	85	67,0	5	201	101	210	105	35																									
	TFE10100	Ø10 x 100	✓			SW 15								15					45																									
	TFE10120	Ø10 x 120	✓			SW 15								35					65																									
	TFE10140	Ø10 x 140	✓			SW 15								55					85																									


General Installation parameters				Standard Installation depth (h _{ef, std})																Reduced Installation depth (h _{ef, red})									
Family	Code	Size	Assessed	Drill bit diameter	Fixture clearance hole	Spanner	Maximum torque	Minimum allowable spacing	Minimum allowable edge distance	Minimum concrete thickness	Depth of drill hole	Installation depth	Effective anchorage depth	Thickness of fixture	Critical spacing (concrete cone)	Critical edge distance (cone)	Critical spacing (splitting)	Critical edge distance (splitting)	Minimum concrete thickness	Depth of drill hole	Installation depth	Effective anchorage depth	Thickness of fixture	Critical spacing (concrete cone)	Critical edge distance (cone)	Critical spacing (splitting)	Critical edge distance (splitting)		
[--]	[--]	[--]	ETA	d ₀ [mm]	d _f [mm]	SW/Tx [--]	T _{inst} [Nm]	S _{min} [mm]	C _{min} [mm]	h _{min} [mm]	h ₁ [mm]	h _{nom} [mm]	h _{ef} [mm]	t _{fix} [mm]	S _{cr,N} [mm]	C _{cr,N} [mm]	S _{cr,sp} [mm]	C _{cr,sp} [mm]	h _{min} [mm]	h ₁ [mm]	h _{nom} [mm]	h _{ef} [mm]	t _{fix} [mm]	S _{cr,N} [mm]	C _{cr,N} [mm]	S _{cr,sp} [mm]	C _{cr,sp} [mm]		
TFE	TFE12080	Ø12 x 80	✓	12	16	SW 18	50	75	45	--	--	--	--	--	--	--	--	--	--	120	90	75	58,0	5	174	87	190	95	
	TFE12090	Ø12 x 90	✓			SW 18				--	--	--	--	--	--	--	--												
	TFE12110	Ø12 x 110	✓			SW 18				170	120	105	83,5	5	251	126	220	110	35										
	TFE12130	Ø12 x 130	✓			SW 18								25					55										
	TFE12150	Ø12 x 150	✓			SW 18								45					75										
	TFE14080	Ø14 x 80	✓	14	18	SW 21	70	80	50	--	--	--	--	--	--	--	--	--	120	90	75	58,0	5	174	87	190	95		
	TFE14100	Ø14 x 100	✓			SW 21				--	--	--	--	--	--	--	--	--											
	TFE14120	Ø14 x 120	✓			SW 21				185	130	115	92,0	5	276	138	230	115					45						
	TFE14130	Ø14 x 130	✓			SW 21								15									55						
	TFE14140	Ø14 x 140	✓			SW 21								25									65						
	TFE14160	Ø14 x 160	✓			SW 21								45									85						
	TFE18100	Ø18 x 100	✓	18	22	SW 24	90	90	55	--	--	--	--	--	--	--	--	--	140	110	90	69,5	10	209	105	230	115		
	TFE18130	Ø18 x 130	✓			SW 24				--	--	--	--	--	--	--	--	--											
	TFE18160	Ø18 x 160	✓			SW 24				225	160	140	112,0	20	336	168	350	175					40						
	TFE18180	Ø18 x 180	✓			SW 24								40									90						
	TFE18200	Ø18 x 200	✓			SW 24								60									110						
TFN	TFN14080	Ø14 x 80	✓	14	18	SW 24	70	80	50	--	--	--	--	--	--	--	--	--	120	90	75	58,0	5	174	87	190	95		

General Installation parameters										Standard Installation depth (h _{ef, std})									Reduced Installation depth (h _{ef, red})									
Family	Code	Size	Assessed	Drill bit diameter	Fixture clearance hole	Spanner	Maximum torque	Minimum allowable spacing	Minimum allowable edge	Minimum concrete thickness	Depth of drill hole	Installation depth	Effective anchorage depth	Thickness of fixture	Critical spacing (concrete cone)	Critical edge distance (cone)	Critical spacing (splitting)	Critical edge distance (splitting)	Minimum concrete thickness	Depth of drill hole	Installation depth	Effective anchorage depth	Thickness of fixture	Critical spacing (concrete cone)	Critical edge distance (cone)	Critical spacing (splitting)	Critical edge distance (splitting)	
[--]	[--]	[--]	ETA	d ₀ [mm]	d _f [mm]	SW/Tx [--]	T _{inst} [Nm]	S _{min} [mm]	C _{min} [mm]	h _{min} [mm]	h ₁ [mm]	h _{nom} [mm]	h _{ef} [mm]	t _{fix} [mm]	S _{cr,N} [mm]	C _{cr,N} [mm]	S _{cr,sp} [mm]	C _{cr,sp} [mm]	h _{min} [mm]	h ₁ [mm]	h _{nom} [mm]	h _{ef} [mm]	t _{fix} [mm]	S _{cr,N} [mm]	C _{cr,N} [mm]	S _{cr,sp} [mm]	C _{cr,sp} [mm]	
Beton Schroef SR-anti Cor ETA 1 TX30	THA05040	Ø5 x 40	--	5	7	TX25	8	35	35	--	--	--	--	--	--	--	--	--	--	100	40	35	25,0	5	75	38	90	45
	THA05060	Ø5 x 60	--			TX25				15	105	53	170	85	25													
	THA05080	Ø5 x 80	--			TX25				35					45													
	THA05100	Ø5 x 100	--			TX25				55					65													
	THA06045	Ø6 x 45	✓	6	9	TX30	10	35	35	--	--	--	--	--	--	--	--	--	100	45	35	26,0	10	78	39	90	45	
	THA06050	Ø6 x 50	✓			TX30				--	--	--	--	--	--	15												
	4050001600	Ø6 x 60	✓			TX30				5	129	65	170	85	25													
	4050001608	Ø6 x 80	✓			TX30				25					45													
	4050001616	Ø6 x 120	✓			TX30				65					85													
	4050001624	Ø6 x 140	✓			TX30				85					105													
	THA08060	Ø8 x 60	✓	8	12	TX45	20	35	35	--	--	--	--	--	--	--	--	--	100	60	50	37,5	10	113	57	130	65	
	THA08080	Ø8 x 80	✓			TX45				15	152	76	200	100	30													
	THA08100	Ø8 x 100	✓			TX45				35					70													
	THA08120	Ø8 x 120	✓			TX45				55																		
	THA10100	Ø10 x 100	✓	10	14	TX50	30	50	40	135	95	85	67,0	15	201	101	210	105	100	65	55	41,5	45	125	63	140	70	
	THA10120	Ø10 x 120	✓			TX50								35									65					
THT	THT06040	Ø6 x 40	✓	6	9	TX30	10	35	35	--	--	--	--	--	--	--	--	--	--	100	45	35	26,0	5	78	39	90	45
	THT06050	Ø6 x 50	✓			TX30				--	--	--	--	--	--	15												
	THT06060	Ø6 x 60	✓			TX30				100	65	55	43,0	5	129	65	170	85	25									
THP	THP05040	Ø5 x 40	--	5	7	TX30	8	35	35	--	--	--	--	--	--	--	--	--	--	100	40	35	25,0	5	75	38	90	45
	THP05060	Ø5 x 60	--			TX30				100	50	45	35,0	15	105	53	170	85	25									
	THP06040	Ø6 x 40	✓	6	9	TX40	10	35	35	--	--	--	--	--	--	--	--	--	100	45	35	26,0	5	78	39	90	45	
	THP06050	Ø6 x 50	✓			TX40				--	--	--	--	--	--	15												
	THP06060	Ø6 x 60	✓			TX40				100	65	55	43,0	5	129	65	170	85					25					
	THP06080	Ø6 x 80	✓			TX40								25								45						
	THP06100	Ø6 x 100	✓			TX40								45								65						
	THP08060	Ø8 x 60	✓	8	12	TX45	20	35	35	--	--	--	--	--	--	--	--	--	100	60	50	37,5	10	113	57	130	65	
THP08080	Ø8 x 80	✓	TX45			100				75	65	50,5	15	152	76	200	100	30										

General Installation parameters										Standard Installation depth ($h_{ef, std}$)									Reduced Installation depth ($h_{ef, red}$)								
Family	Code	Size	Assessed	Drill bit diameter	Fixture clearance hole	Spanner	Maximum torque	Minimum allowable spacing	Minimum allowable edge distance	Minimum concrete thickness	Depth of drill hole	Installation depth	Effective anchorage depth	Thickness of fixture	Critical spacing (concrete cone)	Critical edge distance (cone)	Critical spacing (splitting)	Critical edge distance (splitting)	Minimum concrete thickness	Depth of drill hole	Installation depth	Effective anchorage depth	Thickness of fixture	Critical spacing (concrete cone)	Critical edge distance (cone)	Critical spacing (splitting)	Critical edge distance (splitting)
[--]	[--]	[--]	ETA	d_0 [mm]	d_f [mm]	SW/Tx [--]	T_{inst} [Nm]	S_{min} [mm]	C_{min} [mm]	h_{min} [mm]	h_1 [mm]	h_{nom} [mm]	h_{ef} [mm]	t_{fix} [mm]	$S_{cr,N}$ [mm]	$C_{cr,N}$ [mm]	$S_{cr,sp}$ [mm]	$C_{cr,sp}$ [mm]	h_{min} [mm]	h_1 [mm]	h_{nom} [mm]	h_{ef} [mm]	t_{fix} [mm]	$S_{cr,N}$ [mm]	$C_{cr,N}$ [mm]	$S_{cr,sp}$ [mm]	$C_{cr,sp}$ [mm]
TFF	TFF06035	Ø6 x 35 (M8-M10)	✓	6	--	SW 13	10	35	35	--	--	--	--	--	--	--	--	--	100	45	35	26,0	--	78	39	90	45
	TFF06055	Ø6 x 55 (M8-M10)	✓			SW 13				100	65	55	43,0	--	129	65	170	85	--	--	--	--	--	--	--	--	--
TFM	TFM06035	Ø6 x 35 (M8)	✓	6	--	SW 13	10	35	35	--	--	--	--	--	--	--	--	--	100	65	55	26,0	--	78	39	90	45
	TFM06055	Ø6 x 55 (M10)	✓			SW 13				100	65	55	43,0	--	129	65	170	85	--	--	--	--	--	--	--	--	--
TFS	TFS06100	Ø6 x 100 (M8)	✓	6	9	SW 5	10	35	35	100	65	55	43,0	31	129	65	170	85	100	45	35	26,0	51	78	39	90	45
	TFS06120	Ø6 x 120 (M8)	✓			SW 5								51									71				
	TFS08110	Ø8 x 110 (M10)	✓	8	12	SW 7	20	35	35	100	75	65	50,5	29	152	76	200	100	100	60	50	37,5	44	113	57	130	65
	TFS08130	Ø8 x 130 (M10)	✓			SW 7								44									64				
	TFS10120	Ø10 x 120 (M12)	✓	10	14	SW 8	30	50	40	120	85	75	58,5	26	176	88	190	95	100	65	55	41,5	46	125	63	140	70
	TFS10140	Ø10 x 140 (M12)	✓			SW 8								46									66				

4. INSTALLATION PROCEDURE

4.1. CONCRETE INSTALLATION

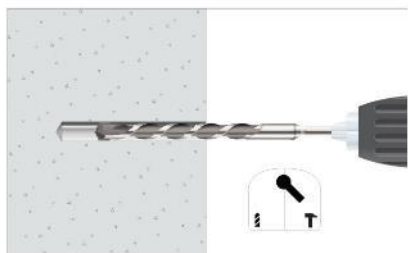


1. DRILLING

Check the concrete is well compacted and without significant porosity. Suitable for dry, wet and flooded holes.
Use drill in hammer mode.
Drill according to specified depths in previous tables.




2. BLOW AND CLEAN

Clean the hole from dust and concrete remains.
Use blow pump and brush.

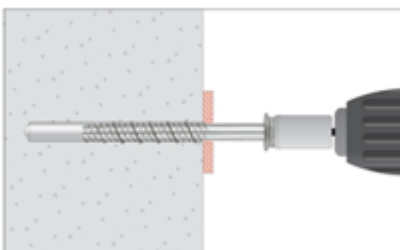

3. INSTALL

Select a powered impact wrench or a torque wrench that does not exceed the maximum torque indicated in previous tables.
Attach an appropriate size hex socket to the wrench.
Mount the screw anchor head in the socket.

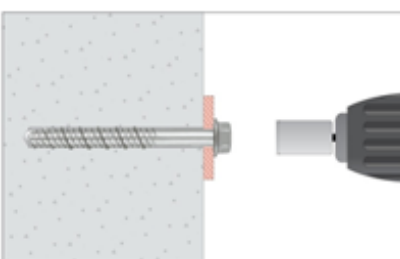

4. APPLY THE TORQUE

Drive the anchor with an impact driver or a torque wrench through the fixture and into the hole until the anchor head washer comes in contact with the fixture. The anchor must be snug after installation. Do not spin the hex socket off the anchor to disengage.

5. RESISTANCES

Resistances in concrete class C20/25 for an isolated anchor without spacing or concrete edge distance effects are indicated in the following table:

Values underlined and in italics show Steel failure, bold values concrete failure and other indicate pull out failure.
1 kN ≈ 100 kg

5.1 CHARACTERISTIC RESISTANCE (STRUCTURAL APPLICATION) [kN]

General Parameter				Non-cracked concrete				Cracked concrete			
Family	Code	Size	ETA Assessed	Tension $N_{Rk, ucr}$		Shear $V_{Rk, ucr}$		Tension $N_{Rk, ucr}$		Shear $V_{Rk, ucr}$	
				($h_{ef, std}$)	($h_{ef, red}$)	($h_{ef, std}$)	($h_{ef, red}$)	($h_{ef, std}$)	($h_{ef, red}$)	($h_{ef, std}$)	($h_{ef, red}$)
Betonschroef SR-anti cor ETA 1	4050001508	Ø5 x 40	--	--	6,88	--	6,88	--	4,91	--	4,91
	THE05050	Ø5 x 50	--	10,44	6,88	<u>8,19</u>	6,88	7,45	4,91	7,45	4,91
	4050001516	Ø5 x 60	--								
	THE05080	Ø5 x 80	--								
	THE05100	Ø5 x 100	--	14,21	5,00	<u>12,53</u>	6,68	10,15	4,77	10,15	4,77
	4050001524	Ø6 x 40	✓								
	THE06050	Ø6 x 50	✓								
	4050001532	Ø6 x 60	✓	18,09	11,57	<u>18,09</u>	11,57	12,92	8,27	12,92	8,27
	THE06070	Ø6 x 70	✓								
	4050001540	Ø6 x 80	✓								
	4050001548	Ø6 x 100	✓	27,64	13,47	<u>27,40</u>	13,47	19,74	9,62	<u>27,40</u>	9,62
	THE06120	Ø6 x 120	✓								
	4050001556	Ø8 x 55	✓								
	4050001564	Ø8 x 60	✓	38,46	22,26	<u>37,24</u>	22,26	27,47	15,90	<u>37,24</u>	15,90
	4050001572	Ø8 x 70	✓								
	THE08080	Ø8 x 80	✓								
	4050001580	Ø8 x 90	✓	44,47	22,26	<u>52,72</u>	22,26	31,77	15,90	<u>52,72</u>	15,90
	THE08100	Ø8 x 100	✓								
	THE08110	Ø8 x 110	✓								
	THE08120	Ø8 x 120	✓	59,74	29,20	<u>80,78</u>	58,40	42,67	20,86	<u>80,78</u>	41,72
	THE08140	Ø8 x 140	✓								
	THE10060	Ø10 x 60	✓								
	4050001588	Ø10 x 70	✓	29,20	18,09	<u>29,20</u>	18,09	20,86	15,90	<u>29,20</u>	15,90
	THE10080	Ø10 x 80	✓								
	THE10090	Ø10 x 90	✓								
	4050001596	Ø10 x 100	✓	29,20	18,09	<u>29,20</u>	18,09	20,86	15,90	<u>29,20</u>	15,90
	THE10120	Ø10 x 120	✓								
	THE10140	Ø10 x 140	✓								
	THE12080	Ø12 x 80	✓	29,20	18,09	<u>29,20</u>	18,09	20,86	15,90	<u>29,20</u>	15,90
	THE12090	Ø12 x 90	✓								
	THE12110	Ø12 x 110	✓								
	THE12130	Ø12 x 130	✓	29,20	18,09	<u>29,20</u>	18,09	20,86	15,90	<u>29,20</u>	15,90
	THE12150	Ø12 x 150	✓								
	THE14080	Ø14 x 80	✓								
	THE14100	Ø14 x 100	✓	29,20	18,09	<u>29,20</u>	18,09	20,86	15,90	<u>29,20</u>	15,90
	THE14120	Ø14 x 120	✓								
	THE14130	Ø14 x 130	✓								
	THE14140	Ø14 x 140	✓	29,20	18,09	<u>29,20</u>	18,09	20,86	15,90	<u>29,20</u>	15,90
	THE14160	Ø14 x 160	✓								
	THE18100	Ø18 x 100	✓								
	THE18130	Ø18 x 130	✓	29,20	18,09	<u>29,20</u>	18,09	20,86	15,90	<u>29,20</u>	15,90
	THE18160	Ø18 x 160	✓								
	THE18180	Ø18 x 180	✓								
	THE18200	Ø18 x 200	✓								

General Parameter				Non-cracked concrete				Cracked concrete											
Family	Code	Size	ETA	Tension $N_{Rk, ucr}$		Shear $V_{Rk, ucr}$		Tension $N_{Rk, ucr}$		Shear $V_{Rk, ucr}$									
			Assessed	($h_{ef, std}$)	($h_{ef, red}$)	($h_{ef, std}$)	($h_{ef, red}$)	($h_{ef, std}$)	($h_{ef, red}$)	($h_{ef, std}$)	($h_{ef, red}$)								
TFE	TFE05040	Ø5 x 40	--	--	6,88	--	6,88	--	4,91	--	4,91								
	TFE05050	Ø5 x 50	--	10,44	6,88	<u>8,19</u>	6,88	7,45	4,91	7,45	4,91								
	TFE05060	Ø5 x 60	--																
	TFE05080	Ø5 x 80	--																
	TFE05100	Ø5 x 100	--																
	TFE06040	Ø6 x 40	✓	--	5,00	--	6,68	--	4,77	--	4,77								
	TFE06050	Ø6 x 50	✓	--		--		--		--									
	TFE06060	Ø6 x 60	✓	14,21	5,00	<u>12,53</u>	6,68	10,15	4,77	10,15	4,77								
	TFE06070	Ø6 x 70	✓																
	TFE06080	Ø6 x 80	✓																
	TFE06100	Ø6 x 100	✓																
	TFE06120	Ø6 x 120	✓																
	TFE08055	Ø8 x 55	✓	--	11,57	--	11,57	--	8,27	--	8,27								
	TFE08060	Ø8 x 60	✓	--		--		--		--									
	TFE08070	Ø8 x 70	✓	18,09	11,57	18,09	11,57	12,92	8,27	12,92	8,27								
	TFE08080	Ø8 x 80	✓																
	TFE08090	Ø8 x 90	✓																
	TFE08100	Ø8 x 100	✓																
	TFE08110	Ø8 x 110	✓																
	TFE08120	Ø8 x 120	✓	27,64	13,47	<u>27,40</u>	13,47	19,74	9,62	<u>27,40</u>	9,62								
	TFE08140	Ø8 x 140	✓																
	TFE10060	Ø10 x 60	✓									--	13,47	--	13,47	--	9,62	--	9,62
	TFE10070	Ø10 x 70	✓									--		--		--		--	
	TFE10080	Ø10 x 80	✓	--	--	--	--												
	TFE10090	Ø10 x 90	✓	27,64	13,47	<u>27,40</u>	13,47	19,74	9,62	<u>27,40</u>	9,62								
	TFE10100	Ø10 x 100	✓																
	TFE10120	Ø10 x 120	✓																
	TFE10140	Ø10 x 140	✓																
	TFE12080	Ø12 x 80	✓	--	22,26	--	22,26	--	15,90	--	15,90								
	TFE12090	Ø12 x 90	✓	--		--		--		--									
	TFE12110	Ø12 x 110	✓	38,46	22,26	<u>37,24</u>	22,26	27,47	15,90	<u>37,24</u>	15,90								
	TFE12130	Ø12 x 130	✓																
TFE12150	Ø12 x 150	✓																	
TFE14080	Ø14 x 80	✓	--	22,26	--	22,26	--	15,90	--	15,90									
TFE14100	Ø14 x 100	✓	--		--		--		--										
TFE14120	Ø14 x 120	✓	44,47	22,26	<u>52,72</u>	22,26	31,77	15,90	<u>52,72</u>	15,90									
TFE14130	Ø14 x 130	✓																	
TFE14140	Ø14 x 140	✓																	
TFE14160	Ø14 x 160	✓																	
TFE18100	Ø18 x 100	✓	--	29,20	--	58,40	--	20,86	--	41,72									
TFE18130	Ø18 x 130	✓	--		--		--		--										
TFE18160	Ø18 x 160	✓	59,74	29,20	<u>80,78</u>	58,40	42,67	20,86	<u>80,78</u>	41,72									
TFE18180	Ø18 x 180	✓																	
TFE18200	Ø18 x 200	✓																	
TFN	TFN14080	Ø14 x 80	✓	--	22,26	--	22,26	--	15,90	--	15,90								
Betonschroef SR-anti Cor ETA 1 TX30	THA05040	Ø5 x 40	--	--	6,88	--	6,88	--	4,91	--	4,91								
	THA05060	Ø5 x 60	--	10,44	6,88	<u>8,19</u>	6,88	7,45	4,91	7,45	4,91								
	THA05080	Ø5 x 80	--																
	THA05100	Ø5 x 100	--																
	THA06045	Ø6 x 45	✓																
	THA06050	Ø6 x 50	✓	--	5,00	--	6,68	--	4,77	--	4,77								
	4050001600	Ø6 x 60	✓	14,21		<u>12,53</u>		10,15		4,77		10,15	4,77						
	4050001608	Ø6 x 80	✓																
	4050001616	Ø6 x 120	✓																
	4050001624	Ø6 x 140	✓																
	THA08060	Ø8 x 60	✓	--	11,57	--	11,57	--	8,27	--	8,27								
	THA08080	Ø8 x 80	✓	18,09	11,57	18,09	11,57	12,92	8,27	12,92	8,27								
	THA08100	Ø8 x 100	✓																
	THA08120	Ø8 x 120	✓																
	THA10100	Ø10 x 100	✓																
	THA10120	Ø10 x 120	✓	27,64	13,47	<u>27,40</u>	13,47	19,74	9,62	<u>27,40</u>	9,62								

General Parameter				Non-cracked concrete				Cracked concrete			
Family	Code	Size	ETA Assessed	Tension $N_{Rk, ucr}$		Shear $V_{Rk, ucr}$		Tension $N_{Rk, ucr}$		Shear $V_{Rk, ucr}$	
				($h_{ef, sta}$)	($h_{ef, red}$)	($h_{ef, sta}$)	($h_{ef, red}$)	($h_{ef, sta}$)	($h_{ef, red}$)	($h_{ef, sta}$)	($h_{ef, red}$)
THT	THT06040	Ø6 x 40	✓	--	5,00	--	6,68	--	4,77	--	4,77
	THT06050	Ø6 x 50	✓	--		--		--		--	
	THT06060	Ø6 x 60	✓	14,21	5,00	<u>12,53</u>	6,68	10,15	4,77	10,15	4,77
THP	THP05040	Ø5 x 40	--	--	6,88	--	6,88	--	4,91	--	4,91
	THP05060	Ø5 x 60	--	10,44	6,88	<u>8,19</u>	6,88	7,45	4,91	7,45	4,91
	THP06040	Ø6 x 40	✓	--	5,00	--	6,68	10,15	4,77	--	4,77
	THP06050	Ø6 x 50	✓	--		--		--		--	
	THP06060	Ø6 x 60	✓	14,21	5,00	<u>12,53</u>	6,68	10,15	4,77	10,15	4,77
	THP06080	Ø6 x 80	✓								
	THP06100	Ø6 x 100	✓								
	THP08060	Ø8 x 60	✓	--	11,57	--	11,57	--	8,27	--	8,27
	THP08080	Ø8 x 80	✓	18,09	11,57	18,09	11,57	12,92	8,27	12,92	8,27
TFF	TFF06035	Ø6 x 35 (M8-M10)	✓	--	5,00	--	--	--	4,77	--	--
	TFF06055	Ø6 x 55 (M8-M10)	✓	14,21	--	--	--	10,15	--	--	--
TFM	TFM06035	Ø6 x 35 (M8)	✓	--	5,00	--	--	--	4,77	--	--
	TFM06055	Ø6 x 55 (M10)	✓	14,21	--	--	--	10,15	--	--	--
TFS	TFS06100	Ø6 x 100 (M8)	✓	14,21	5,00	<u>12,53</u>	6,68	10,15	4,77	10,15	4,77
	TFS06120	Ø6 x 120 (M8)	✓								
	TFS08110	Ø8 x 110 (M10)	✓	18,09	11,57	18,09	11,57	12,92	8,27	12,92	8,27
	TFS08130	Ø8 x 130 (M10)	✓								
	TFS10120	Ø10 x 120 (M12)	✓	22,55	13,47	22,55	13,47	16,11	9,62	16,11	9,62
	TFS10140	Ø10 x 140 (M12)	✓								

5.2 DESIGN RESISTANCE (STRUCTURAL APPLICATION) [kN]

General Parameter				Non-cracked concrete				Cracked concrete			
Family	Code	Size	ETA Assessed	Tension $N_{Rk, ucr}$		Shear $V_{Rk, ucr}$		Tension $N_{Rk, ucr}$		Shear $V_{Rk, ucr}$	
				($h_{ef, std}$)	($h_{ef, red}$)	($h_{ef, std}$)	($h_{ef, red}$)	($h_{ef, std}$)	($h_{ef, red}$)	($h_{ef, std}$)	($h_{ef, red}$)
Betonschroef SR-anti cor ETA 1	4050001508	Ø5 x 40	--	--	4,58	--	4,58	--	3,27	--	3,27
	THE05050	Ø5 x 50	--	6,96	4,58	5,46	4,58	4,97	3,27	4,97	3,27
	4050001516	Ø5 x 60	--								
	THE05080	Ø5 x 80	--								
	THE05100	Ø5 x 100	--	9,47	2,78	8,35	4,45	6,77	2,65	6,77	3,18
	4050001524	Ø6 x 40	✓								
	THE06050	Ø6 x 50	✓								
	4050001532	Ø6 x 60	✓	9,47	2,78	8,35	4,45	6,77	2,65	6,77	3,18
	THE06070	Ø6 x 70	✓								
	4050001540	Ø6 x 80	✓								
	4050001548	Ø6 x 100	✓	12,06	6,43	12,06	7,72	8,61	4,59	8,61	5,51
	THE06120	Ø6 x 120	✓								
	4050001556	Ø8 x 55	✓								
	4050001564	Ø8 x 60	✓	12,06	6,43	12,06	7,72	8,61	4,59	8,61	5,51
	4050001572	Ø8 x 70	✓								
	THE08080	Ø8 x 80	✓								
	4050001580	Ø8 x 90	✓	12,06	6,43	12,06	7,72	8,61	4,59	8,61	5,51
	THE08100	Ø8 x 100	✓								
	THE08110	Ø8 x 110	✓								
	THE08120	Ø8 x 120	✓	18,43	8,98	18,27	8,98	13,16	6,42	18,27	6,42
	THE08140	Ø8 x 140	✓								
	THE10060	Ø10 x 60	✓								
	4050001588	Ø10 x 70	✓	18,43	8,98	18,27	8,98	13,16	6,42	18,27	6,42
	THE10080	Ø10 x 80	✓								
	THE10090	Ø10 x 90	✓								
	4050001596	Ø10 x 100	✓	18,43	8,98	18,27	8,98	13,16	6,42	18,27	6,42
	THE10120	Ø10 x 120	✓								
	THE10140	Ø10 x 140	✓								
	THE12080	Ø12 x 80	✓	25,64	14,84	24,83	14,84	18,31	10,60	24,83	10,60
	THE12090	Ø12 x 90	✓								
	THE12110	Ø12 x 110	✓								
	THE12130	Ø12 x 130	✓	29,65	14,84	35,15	14,84	21,18	10,60	35,15	10,60
	THE12150	Ø12 x 150	✓								
	THE14080	Ø14 x 80	✓								
	THE14100	Ø14 x 100	✓	29,65	14,84	35,15	14,84	21,18	10,60	35,15	10,60
	THE14120	Ø14 x 120	✓								
	THE14130	Ø14 x 130	✓								
	THE14140	Ø14 x 140	✓	39,83	19,47	53,85	38,94	28,45	13,91	53,85	27,81
	THE14160	Ø14 x 160	✓								
	THE18100	Ø18 x 100	✓								
	THE18130	Ø18 x 130	✓	39,83	19,47	53,85	38,94	28,45	13,91	53,85	27,81
	THE18160	Ø18 x 160	✓								
	THE18180	Ø18 x 180	✓								
	THE18200	Ø18 x 200	✓								

General Parameter				Non-cracked concrete				Cracked concrete			
Family	Code	Size	ETA	Tension $N_{Rk, ucr}$		Shear $V_{Rk, ucr}$		Tension $N_{Rk, ucr}$		Shear $V_{Rk, ucr}$	
			Assessed	($h_{ef, std}$)	($h_{ef, red}$)	($h_{ef, std}$)	($h_{ef, red}$)	($h_{ef, std}$)	($h_{ef, red}$)	($h_{ef, std}$)	($h_{ef, red}$)
TFE	TFE05040	Ø5 x 40	--	--	4,58	--	4,58	--	3,27	--	3,27
	TFE05050	Ø5 x 50	--	6,96	4,58	<u>5,46</u>	4,58	4,97	3,27	4,97	3,27
	TFE05060	Ø5 x 60	--								
	TFE05080	Ø5 x 80	--								
	TFE05100	Ø5 x 100	--								
	TFE06040	Ø6 x 40	✓	--	2,78	--	4,45	--	2,65	--	3,18
	TFE06050	Ø6 x 50	✓	--		--		--		--	
	TFE06060	Ø6 x 60	✓	9,47	2,78	<u>8,35</u>	4,45	6,77	2,65	6,77	3,18
	TFE06070	Ø6 x 70	✓								
	TFE06080	Ø6 x 80	✓								
	TFE06100	Ø6 x 100	✓								
	TFE06120	Ø6 x 120	✓								
	TFE08055	Ø8 x 55	✓	--	6,43	--	7,72	--	4,59	--	5,51
	TFE08060	Ø8 x 60	✓	--		--		--		--	
	TFE08070	Ø8 x 70	✓	12,06	6,43	12,06	7,72	8,61	4,59	8,61	5,51
	TFE08080	Ø8 x 80	✓								
	TFE08090	Ø8 x 90	✓								
	TFE08100	Ø8 x 100	✓								
	TFE08110	Ø8 x 110	✓								
	TFE08120	Ø8 x 120	✓								
	TFE08140	Ø8 x 140	✓								
	TFE10060	Ø10 x 60	✓	--	8,98	--	8,98	--	6,42	--	6,42
	TFE10070	Ø10 x 70	✓	--		--		--		--	
	TFE10080	Ø10 x 80	✓	--		--		--		--	
	TFE10090	Ø10 x 90	✓	18,43	8,98	<u>18,27</u>	8,98	13,16	6,42	<u>18,27</u>	6,42
	TFE10100	Ø10 x 100	✓								
	TFE10120	Ø10 x 120	✓								
	TFE10140	Ø10 x 140	✓								
	TFE12080	Ø12 x 80	✓	--	14,84	--	14,84	--	10,60	--	10,60
	TFE12090	Ø12 x 90	✓	--		--		--		--	
	TFE12110	Ø12 x 110	✓	25,64	14,84	<u>24,83</u>	14,84	18,31	10,60	<u>24,83</u>	10,60
	TFE12130	Ø12 x 130	✓								
	TFE12150	Ø12 x 150	✓								
	TFE14080	Ø14 x 80	✓	--	14,84	--	14,84	--	10,60	--	10,60
	TFE14100	Ø14 x 100	✓	--		--		--		--	
	TFE14120	Ø14 x 120	✓	29,65	14,84	<u>35,15</u>	14,84	21,18	10,60	<u>35,15</u>	10,60
	TFE14130	Ø14 x 130	✓								
	TFE14140	Ø14 x 140	✓								
	TFE14160	Ø14 x 160	✓								
	TFE18100	Ø18 x 100	✓	--	19,47	--	38,94	--	13,91	--	27,81
	TFE18130	Ø18 x 130	✓	--		--		--		--	
	TFE18160	Ø18 x 160	✓	39,83	19,47	<u>53,85</u>	38,94	28,45	13,91	<u>53,85</u>	27,81
	TFE18180	Ø18 x 180	✓								
	TFE18200	Ø18 x 200	✓								
TFN	TFN14080	Ø14 x 80	✓	--	14,84	--	14,84	--	10,60	--	10,60
Betonschroef SR-anti Cor ETA 1 TX30	THA05040	Ø5 x 40	--	--	4,58	--	4,58	--	3,27	--	3,27
	THA05060	Ø5 x 60	--	6,96	4,58	<u>5,46</u>	4,58	4,97	3,27	4,97	3,27
	THA05080	Ø5 x 80	--								
	THA05100	Ø5 x 100	--								
	THA06045	Ø6 x 45	✓	--	2,78	--	4,45	--	2,65	--	3,18
	THA06050	Ø6 x 50	✓	--		--		--		--	
	4050001600	Ø6 x 60	✓	9,47	2,78	<u>8,35</u>	4,45	6,77	2,65	6,77	3,18
	4050001608	Ø6 x 80	✓								
	4050001616	Ø6 x 120	✓								
	4050001624	Ø6 x 140	✓								
	THA08060	Ø8 x 60	✓	--	6,43	--	7,72	--	4,59	--	5,51
	THA08080	Ø8 x 80	✓	12,06	6,43	12,06	7,72	8,61	4,59	8,61	5,51
	THA08100	Ø8 x 100	✓								
	THA08120	Ø8 x 120	✓								
	THA10100	Ø10 x 100	✓	18,43	8,98	<u>18,27</u>	8,98	13,16	6,42	<u>18,27</u>	6,42
	THA10120	Ø10 x 120	✓								

General Parameter				Non-cracked concrete				Cracked concrete			
Family	Code	Size	ETA Assessed	Tension $N_{Rk, ucr}$		Shear $V_{Rk, ucr}$		Tension $N_{Rk, ucr}$		Shear $V_{Rk, ucr}$	
THT	THT06040	Ø6 x 40	✓	--	2,78	--	4,45	--	2,65	--	3,18
	THT06050	Ø6 x 50	✓	--	--	--	--	--	--	--	--
	THT06060	Ø6 x 60	✓	9,47	2,78	8,35	4,45	6,77	2,65	6,77	3,18
THP	THP05040	Ø5 x 40	--	--	4,58	--	4,58	--	3,27	--	3,27
	THP05060	Ø5 x 60	--	6,96	4,58	5,46	4,58	4,97	3,27	4,97	3,27
	THP06040	Ø6 x 40	✓	--	--	--	--	--	--	--	--
	THP06050	Ø6 x 50	✓	--	2,78	--	4,45	--	2,65	--	3,18
	THP06060	Ø6 x 60	✓	9,47	2,78	8,35	4,45	6,77	2,65	6,77	3,18
	THP06080	Ø6 x 80	✓								
	THP06100	Ø6 x 100	✓								
	THP08060	Ø8 x 60	✓	--	6,43	--	7,72	--	4,59	--	5,51
TFF	TFF06035	Ø6 x 35 (M8-M10)	✓	--	2,78	--	--	--	2,65	--	--
	TFF06055	Ø6 x 55 (M8-M10)	✓	9,47	--	--	--	6,77	--	--	--
TFM	TFM06035	Ø6 x 35 (M8)	✓	--	2,78	--	--	--	2,65	--	--
	TFM06055	Ø6 x 55 (M10)	✓	9,47	--	--	--	6,77	--	--	--
TFS	TFS06100	Ø6 x 100 (M8)	✓	9,47	2,78	8,35	4,45	6,77	2,65	6,77	3,18
	TFS06120	Ø6 x 120 (M8)	✓								
	TFS08110	Ø8 x 110 (M10)	✓	12,06	6,43	12,06	7,72	8,61	4,59	8,61	5,51
	TFS08130	Ø8 x 130 (M10)	✓								
	TFS10120	Ø10 x 120 (M12)	✓	15,03	8,98	15,03	8,98	10,74	6,42	10,74	6,42
	TFS10140	Ø10 x 140 (M12)	✓								

5.3 MAXIMUM LOADS RECOMMENDED (STRUCTURAL APPLICATION) [kN] (with $\gamma_F = 1.4$)

General Parameter				Non-cracked concrete				Cracked concrete			
Family	Code	Size	ETA	Tension $N_{Rk, ucr}$		Shear $V_{Rk, ucr}$		Tension $N_{Rk, ucr}$		Shear $V_{Rk, ucr}$	
			Assessed	($h_{ef, std}$)	($h_{ef, red}$)	($h_{ef, std}$)	($h_{ef, red}$)	($h_{ef, std}$)	($h_{ef, red}$)	($h_{ef, std}$)	($h_{ef, red}$)
Betonschroef SR-anti cor ETA 1	4050001508	Ø5 x 40	--	--	3,27	--	3,27	--	2,34	--	2,34
	THE05050	Ø5 x 50	--	4,97	3,27	<u>3,90</u>	3,27	3,55	2,34	3,55	2,34
	4050001516	Ø5 x 60	--								
	THE05080	Ø5 x 80	--								
	THE05100	Ø5 x 100	--								
	4050001524	Ø6 x 40	✓	--	1,98	--	3,18	--	1,89	--	2,27
	THE06050	Ø6 x 50	✓	--		--		--		--	
	4050001532	Ø6 x 60	✓	6,77	1,98	<u>5,97</u>	3,18	4,83	1,89	4,83	2,27
	THE06070	Ø6 x 70	✓								
	4050001540	Ø6 x 80	✓								
	4050001548	Ø6 x 100	✓								
	THE06120	Ø6 x 120	✓								
	4050001556	Ø8 x 55	✓	--	4,59	--	5,51	--	3,28	--	3,94
	4050001564	Ø8 x 60	✓	--		--		--		--	
	4050001572	Ø8 x 70	✓	8,61	4,59	8,61	5,51	6,15	3,28	6,15	3,94
	THE08080	Ø8 x 80	✓								
	4050001580	Ø8 x 90	✓								
	THE08100	Ø8 x 100	✓								
	THE08110	Ø8 x 110	✓								
	THE08120	Ø8 x 120	✓								
	THE08140	Ø8 x 140	✓								
	THE10060	Ø10 x 60	✓	--	6,42	--	6,42	--	4,58	--	4,58
	4050001588	Ø10 x 70	✓	--		--		--		--	
	THE10080	Ø10 x 80	✓	--		--		--		--	
	THE10090	Ø10 x 90	✓	13,16	6,42	<u>13,05</u>	6,42	9,40	4,58	<u>13,05</u>	4,58
	4050001596	Ø10 x 100	✓								
	THE10120	Ø10 x 120	✓								
	THE10140	Ø10 x 140	✓								
	THE12080	Ø12 x 80	✓	--	10,60	--	10,60	--	7,57	--	7,57
	THE12090	Ø12 x 90	✓	--		--		--		--	
	THE12110	Ø12 x 110	✓	18,31	10,60	<u>17,73</u>	10,60	13,08	7,57	<u>17,73</u>	7,57
	THE12130	Ø12 x 130	✓								
	THE12150	Ø12 x 150	✓								
	THE14080	Ø14 x 80	✓								
	THE14100	Ø14 x 100	✓	--	10,60	--	10,60	--	7,57	--	7,57
	THE14120	Ø14 x 120	✓	--		--		--		--	
	THE14130	Ø14 x 130	✓	21,18	10,60	<u>25,10</u>	10,60	15,13	7,57	<u>25,10</u>	7,57
	THE14140	Ø14 x 140	✓								
	THE14160	Ø14 x 160	✓								
	THE18100	Ø18 x 100	✓								
	THE18130	Ø18 x 130	✓	--	13,91	--	27,81	--	9,93	--	19,87
	THE18160	Ø18 x 160	✓	--		--		--		--	
	THE18180	Ø18 x 180	✓	28,45	13,91	<u>38,47</u>	27,81	20,32	9,93	<u>38,47</u>	19,87
THE18200	Ø18 x 200	✓									

General Parameter				Non-cracked concrete				Cracked concrete							
Family	Code	Size	ETA	Tension $N_{Rk, ucr}$		Shear $V_{Rk, ucr}$		Tension $N_{Rk, ucr}$		Shear $V_{Rk, ucr}$					
			Assessed	($h_{ef, std}$)	($h_{ef, red}$)	($h_{ef, std}$)	($h_{ef, red}$)	($h_{ef, std}$)	($h_{ef, red}$)	($h_{ef, std}$)	($h_{ef, red}$)				
TFE	TFE05040	Ø5 x 40	--	--	3,27	--	3,27	--	2,34	--	2,34				
	TFE05050	Ø5 x 50	--	4,97	3,27	<u>3,90</u>	3,27	3,55	2,34	3,55	2,34				
	TFE05060	Ø5 x 60	--												
	TFE05080	Ø5 x 80	--												
	TFE05100	Ø5 x 100	--												
	TFE06040	Ø6 x 40	✓	--	1,98	--	3,18	--	1,89	--	2,27				
	TFE06050	Ø6 x 50	✓	--		--		--		--					
	TFE06060	Ø6 x 60	✓	6,77	1,98	<u>5,97</u>	3,18	4,83	1,89	4,83	2,27				
	TFE06070	Ø6 x 70	✓												
	TFE06080	Ø6 x 80	✓												
	TFE06100	Ø6 x 100	✓												
	TFE06120	Ø6 x 120	✓												
	TFE08055	Ø8 x 55	✓	--	4,59	--	5,51	--	3,28	--	3,94				
	TFE08060	Ø8 x 60	✓	--		--		--		--					
	TFE08070	Ø8 x 70	✓	8,61	4,59	8,61	5,51	6,15	3,28	6,15	3,94				
	TFE08080	Ø8 x 80	✓												
	TFE08090	Ø8 x 90	✓												
	TFE08100	Ø8 x 100	✓												
	TFE08110	Ø8 x 110	✓												
	TFE08120	Ø8 x 120	✓												
	TFE08140	Ø8 x 140	✓												
	TFE10060	Ø10 x 60	✓	--	6,42	--	6,42	--	4,58	--	4,58				
	TFE10070	Ø10 x 70	✓	--		--		--		--					
	TFE10080	Ø10 x 80	✓	--		--		--		--					
	TFE10090	Ø10 x 90	✓	13,16	6,42	<u>13,05</u>	6,42	9,40	4,58	<u>13,05</u>	4,58				
	TFE10100	Ø10 x 100	✓												
	TFE10120	Ø10 x 120	✓												
	TFE10140	Ø10 x 140	✓												
	TFE12080	Ø12 x 80	✓	--	10,60	--	10,60	--	7,57	--	7,57				
	TFE12090	Ø12 x 90	✓	--		--		--		--					
	TFE12110	Ø12 x 110	✓	18,31	10,60	<u>17,73</u>	10,60	13,08	7,57	<u>17,73</u>	7,57				
	TFE12130	Ø12 x 130	✓												
	TFE12150	Ø12 x 150	✓												
	TFE14080	Ø14 x 80	✓	--	10,60	--	10,60	--	7,57	--	7,57				
TFE14100	Ø14 x 100	✓	--	--		--		--							
TFE14120	Ø14 x 120	✓	21,18	10,60	<u>25,10</u>	10,60	15,13	7,57	<u>25,10</u>	7,57					
TFE14130	Ø14 x 130	✓													
TFE14140	Ø14 x 140	✓													
TFE14160	Ø14 x 160	✓													
TFE18100	Ø18 x 100	✓	--	13,91	--	27,81	--	9,93	--	19,87					
TFE18130	Ø18 x 130	✓	--		--		--		--						
TFE18160	Ø18 x 160	✓	28,45	13,91	<u>38,47</u>	27,81	20,32	9,93	<u>38,47</u>	19,87					
TFE18180	Ø18 x 180	✓													
TFE18200	Ø18 x 200	✓													
TFN	TFN14080	Ø14 x 80	✓	--	10,60	--	10,60	--	7,57	--	7,57				
Betonschroef SR-anti Cor ETA 1 TX30	THA05040	Ø5 x 40	--	--	3,27	--	3,27	--	2,34	--	2,34				
	THA05060	Ø5 x 60	--	4,97	3,27	<u>3,90</u>	3,27	3,55	2,34	3,55	2,34				
	THA05080	Ø5 x 80	--												
	THA05100	Ø5 x 100	--												
	THA06045	Ø6 x 45	✓												
	THA06050	Ø6 x 50	✓	--	1,98	--	3,18	--	1,89	--	2,27				
	4050001600	Ø6 x 60	✓	--		--		--		--					
	4050001608	Ø6 x 80	✓	6,77	1,98	<u>5,97</u>	3,18	4,83	1,89	4,83	2,27				
	4050001616	Ø6 x 120	✓												
	4050001624	Ø6 x 140	✓												
	THA08060	Ø8 x 60	✓									--	4,59	--	5,51
	THA08080	Ø8 x 80	✓												
	THA08100	Ø8 x 100	✓	8,61	4,59	8,61	5,51	6,15	3,28	6,15	3,94				
	THA08120	Ø8 x 120	✓												
	THA10100	Ø10 x 100	✓	13,16	6,42	<u>13,05</u>	6,42	9,40	4,58	<u>13,05</u>	4,58				
	THA10120	Ø10 x 120	✓												

General Parameter				Non-cracked concrete				Cracked concrete			
Family	Code	Size	ETA	Tension $N_{Rk, ucr}$		Shear $V_{Rk, ucr}$		Tension $N_{Rk, ucr}$		Shear $V_{Rk, ucr}$	
			Assessed	($h_{ef, std}$)	($h_{ef, red}$)	($h_{ef, std}$)	($h_{ef, red}$)	($h_{ef, std}$)	($h_{ef, red}$)	($h_{ef, std}$)	($h_{ef, red}$)
THT	THT06040	Ø6 x 40	✓	--	1,98	--	3,18	--	1,89	--	2,27
	THT06050	Ø6 x 50	✓	--		--		--		--	
	THT06060	Ø6 x 60	✓	6,77	1,98	5,97	3,18	4,83	1,89	4,83	2,27
THP	THP05040	Ø5 x 40	--	--	3,27	--	3,27	--	2,34	--	2,34
	THP05060	Ø5 x 60	--	4,97	3,27	3,90	3,27	3,55	2,34	3,55	2,34
	THP06040	Ø6 x 40	✓	--	1,98	--	3,18	--	1,89	--	2,27
	THP06050	Ø6 x 50	✓	--		--		--		--	
	THP06060	Ø6 x 60	✓	6,77	1,98	5,97	3,18	4,83	1,89	4,83	2,27
	THP06080	Ø6 x 80	✓								
	THP06100	Ø6 x 100	✓								
	THP08060	Ø8 x 60	✓	--	4,59	--	5,51	--	3,28	--	3,94
TFF	THP08080	Ø8 x 80	✓	8,61	4,59	8,61	5,51	6,15	3,28	6,15	3,94
	TFF06035	Ø6 x 35 (M8-M10)	✓	--	1,98	--	--	--	1,89	--	--
TFM	TFF06055	Ø6 x 55 (M8-M10)	✓	6,77	--	--	--	4,83	--	--	--
	TFM06035	Ø6 x 35 (M8)	✓	--	1,98	--	--	--	1,89	--	--
TFS	TFM06055	Ø6 x 55 (M10)	✓	6,77	--	--	--	4,83	--	--	--
	TFS06100	Ø6 x 100 (M8)	✓	6,77	1,98	5,97	3,18	4,83	1,89	4,83	2,27
	TFS06120	Ø6 x 120 (M8)	✓								
	TFS08110	Ø8 x 110 (M10)	✓	8,61	4,59	8,61	5,51	6,15	3,28	6,15	3,94
	TFS08130	Ø8 x 130 (M10)	✓								
	TFS10120	Ø10 x 120 (M12)	✓	10,74	6,42	10,74	6,42	7,67	4,58	7,67	4,58
	TFS10140	Ø10 x 140 (M12)	✓								

PULL OUT INCREASING FACTOR FOR TENSION LOADS IN HIGH RESISTANCE CONCRETE ψ_c															
Diameter	Ø5		Ø6		Ø8		Ø10			Ø12		Ø14		Ø18	
Installation depth	($h_{ef, red}$)	($h_{ef, std}$)	($h_{ef, red}$)	($h_{ef, std}$)	($h_{ef, red}$)	($h_{ef, std}$)	($h_{ef, 1}$)	($h_{ef, 2}$)	($h_{ef, 3}$)	($h_{ef, red}$)	($h_{ef, std}$)	($h_{ef, red}$)	($h_{ef, std}$)	($h_{ef, red}$)	($h_{ef, std}$)
C30/37	1,00	1,00	1,16	1,22	1,21	1,22	1,22	1,17	1,22	1,16	1,22	1,21	1,20	1,22	1,17
C40/50	1,00	1,00	1,28	1,41	1,39	1,41	1,41	1,30	1,41	1,29	1,41	1,39	1,37	1,40	1,32
C50/60	1,00	1,00	1,39	1,58	1,54	1,58	1,58	1,42	1,58	1,40	1,58	1,55	1,51	1,57	1,42

6. OFFICIAL DOCUMENTATION

The following documents are available on our official website www.4tecex.com:

- European assessment ETA 20/0046 for Installation in cracked and non-cracked concrete according to guideline EAD 330232-00-0601, option 1, from Ø6 to Ø18.
- AVCP certificate 1219-CPR-0254 for use in concrete.
- Declaration of performance DoP THE.