



Plastic cable reel Professional For permanent outdoor use.

Article number: EAN: Customs tariff number: Country of origin: K2Y50NTF101Z 8715883002714 8544429090 DE (non-preferential origin)



Manufacturer:

HEDI GmbH Elektro- und Gerätebau, Schöneggweg 17, D-87727 Babenhausen

Dimensions:

temperature:

 Total height: Reel housing diameter: Width (feet): Depth (incl. twist grip): Depth (excl. twist grip): 	393 mm 290 mm 268 mm 243 mm 225 mm	
Accessories (included in delivery):		

Spare parts:	on request from the manufacturer
Carton (inner dimension LxWxH):	290 x 232 x 395 mm
Weight:	9.8 kg
Environmental / operating	-20 +40°C

DATASHEET



Material:

- Cable:
- Plug:
- Feet:
- Reel housing:
- Steckdoseneinsatz:

neoprene-rubber (oil- and UV-resistand) rubber galvanised steel tube + PPGF30 PP, red

PP, sealing elements made of rubber

Electrical data:

- Operating voltage:
- Power rating:
- Cable:
- Plug:
- Socket:

230 V ~ 50 Hz / 16 A cable wound up 1,100 watts cable unwound 3,500 watts 50 m H07RN-F 3G2.5 mm² safety plug 2p+E 16 A / 250 V 3-fold safety socket German 16 A / 250 V / IP44 / with thermal protection switch and diagnosis system DiagS: - Green light on: → Cable reel ready for operating. - Green + red light on: → Thermal protection switch has tripped.


 \rightarrow Power supply has been interrupted.

- Protection class:
- Protection rating:
- Area of apllication:

IP44

L

For permanent outdoor use as well as on constructions sites. Conforms tot he specifications of the DGUV-I 203-006 (formerly BGI 608) as well as of the DGUV I 203-005 (formerly BGI 600), K2.

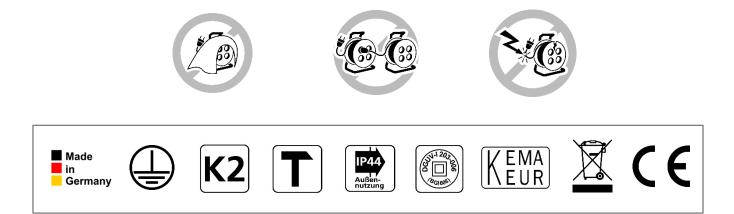

Status: 31.07.2024 Page **2** of **2**