



S45OD06D

PLANFRÄSER POSITIVE FACE MILLING CUTTERS

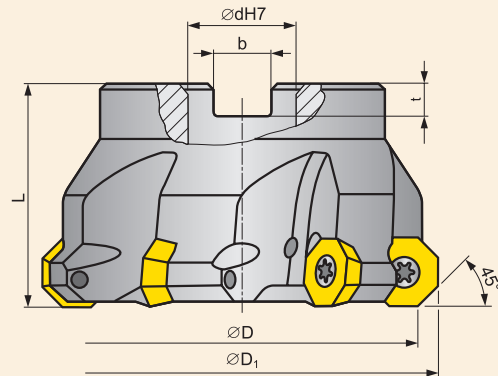

γ_p	$+5^\circ$	κ_r	45°
γ_f	0°	$a_{n\max}$	8,6 mm

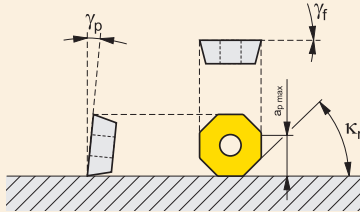


Z* – Anzahl Zähne / Number of teeth

Abmessungen [mm]. / Dimensions [mm].

[illegible]

S45OD06D

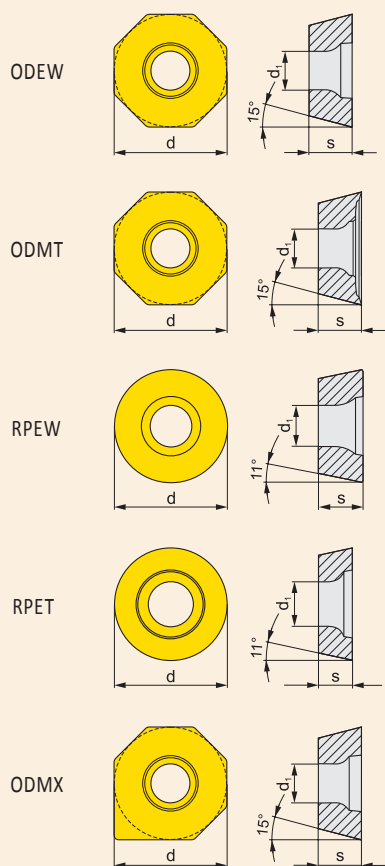
PLANFRÄSER
INSERTS FOR POSITIVE FACE MILLS

WENDESCHNEIDPLATTEN (WSP) / INDEXABLE CUTTING INSERTS

ISO	Materialien / Grades								Abmessungen / Dimensions					
	M5315	M9315	M9325	M8340	8215	8230	8240		d	s	d ₁			
ODEW 0605ZZN						●			15,875	5,56	5,50			
ODMT 0605ZZN	●	●	●	●	●	●	●		15,875	5,56	5,50			
RPEW 1505MOS					●	●			15,875	5,56	5,50			
RPET 1505MOS-M				●		●	●		15,875	5,56	5,50			
ODMX 0605ZZ						○			15,875	5,56	5,50			

ERSATZTEILE / SPARE PARTS

*) Empfohlene Torxschraube – siehe Seite / For screw torques see pages: 394 – 397.

Ø Fräser
Ø CutterSpannschraube*
Clamping screw*Schraubendreher
Screwdriver

63 – 160

US 4511-T20

SDR T20