

Industrial lathes – CU 325x500 VAC ...



Description

Huvema's range of European production lathes. Fitted out with variable speed and fully protected. These machines are perfect for all industrial applications. Users are very enthusiastic about these machines!

Features

- variable speed
- protective covers
- halogen machine light
- cooling system

	CU 325x500 VAC	CU 325x750 VAC
	Item no. 306058	Item no. 306059
Distance between centres	500 mm	750 mm
Brand	Huvema Machine tools	Huvema Machine tools
	CU 325x1000 VAC	
	Item no. 306060	
Distance between centres	1000 mm	
Brand	Huvema Machine tools	

General specifications

- ✓ Swing over bed: 325 mm
- ✓ Swing over cross slide: 190 mm
- ✓ Cross travel support: 150 mm
- ✓ Top slide travel: 95 mm
- ✓ Width of bed: 200 mm
- ✓ Swing in gap: 440 mm
- ✓ Spindle speed values: 85 - 405; 470 - 2200 rpm
- ✓ Hole through spindle: 32 mm
- ✓ Threading metric: (48) 0,1 - 28 mm
- ✓ Threading whitworth: (53) 75 - 2,5 TPI
- ✓ Tailstock diameter: 40 mm
- ✓ Tailstock spindle travel: 100 mm
- ✓ Center height: 165 mm
- ✓ Taper of main spindle: DIN 55027, gr.5
- ✓ Longitudinal feed: 0,006 - 1,77 mm/rev
- ✓ Cross feed range: 0,003 - 0,885 mm/rev
- ✓ Number of thread cuts: 139
- ✓ Threading module: (19) 0,1 - 1,75 Module
- ✓ Threading pitch: (19) 70 - 4 dP
- ✓ Loose head head: MT3
- ✓ Power of main engine: 2,2 kW
- ✓ Weight: 770 kg
- ✓ Voltage: 400 V
- ✓ Number of power supplies: 48

Accessory optional



Set with quick change base holder and toolholders
SWBH SET C 20121004





Live centers
MDC MK3 20121081



Keyless drill chuck
DC 1016-B16-ECO 20112240



Drill chuck arbor with MT shank
MTB 3 ADAPT B16 20112264

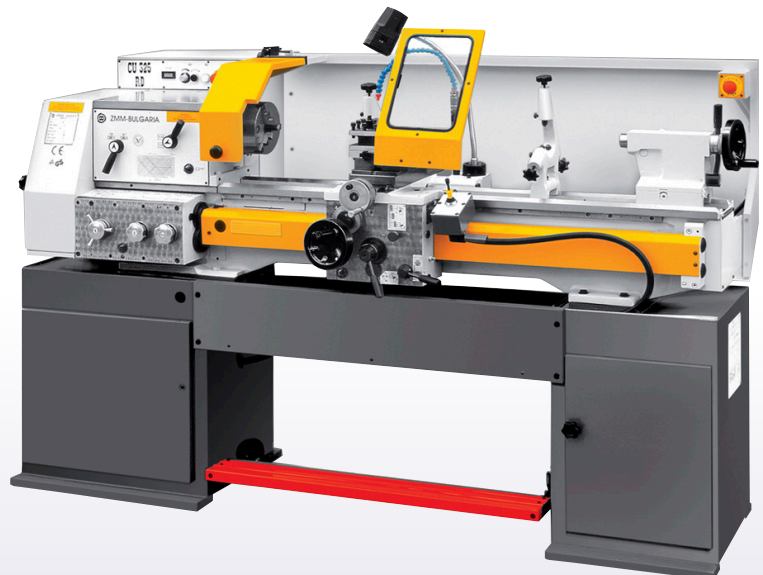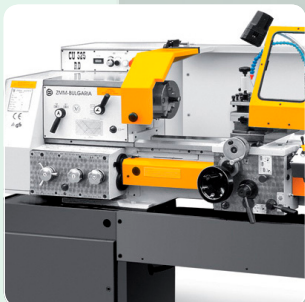

Website CU 325x500 VAC